

VIEW-LITE

High Intensity LED X-Ray Film Viewer

This is the film viewer that the industry has been waiting for...

The **View-Lite 0417LG** film illuminator offers a unique, revolutionary **GREEN** light which allows easy viewing of high density radiographs.

- Ultra-bright – 56,000cd/m
- Low Power Consumption
- Easily View 4 density
- Cool Operation
- Green LED Light
- Dimmer 25% - 100%
- 50,000 Hour Lamp Life
- With Foot Switch

The LED lamps provide a massive intensity of light yet generates only a fraction of the heat of other light sources.

The View-Lite offers an outstanding level of uniform brightness, over 56,000cd/m² from a generously large 12" x 3" (300 x 75mm) viewing area and it only weighs 8.2lbs / 3.7Kg.

Features

Maximum Light Intensity	56,000cd/m ²	Carry Handle / Support	Adjustable
Uniform Viewing Area	95% Full Screen	Design	Modern, Stylish and Simple
Dimmer Control	25% to 100% continuous	Power requirements:	110V/60Hz or 220V/60Hz
Low Heat Approximate	100F (38C)		

Specifications

Overall Dimensions	
Length	22½" (570mm)
Width	6¾" (170mm)
Height	3¼" (80mm)
Weight	8.2lbs / 3.7Kg



Cooling fans ensure the viewing areas does not get hot so there is no danger of damaging films. Small size means it perfect for small mobile dark rooms.

Meets requirements of EN25580: 1992; ASTM E 1390-90 and ISO 5580: 1995

Viewing Area	
Length	12" (300mm)
Width	3" (75mm)

AUTHORISED DISTRIBUTOR

Standard Package Includes
Film Viewer, Foot Switch,
Carry Case, Operating Manual
and Warranty Card



VIEW-LITE 0417 (CE Approved)

MAX VIEW DENSITY; 3.8.0D

LIGHT INTENSITY: 40,000 cd/m²

POWER: 110 OR 220 VAC, 50/60 Hz

LAMP: 2EA. GREEN COLOR PL-36W LAMP

VIEWER WINDOW: 3.46 IN X 13.7IN
(86X 350mm)


HOUSING: RUGGED ALUMINUM FRAME

LIGHT INTENSITY CONTROL: FROM 20%~100% CONTINUOUS CONTROL

COOLING FAN: 3 EA. 4 inch SQUARE 12V HIGH CAPACITY COOLING FAN
HEAT ON THE VIEWER WINDOW: LESS THAN 38C AFTER POWER ON AFTER 2HOURS

FOOT SWITCH ON/OFF CONTROL

OUTSIDE DIMENSION:
490X170X55mm(LXWXH)
WEIGHT: 2.5Kg

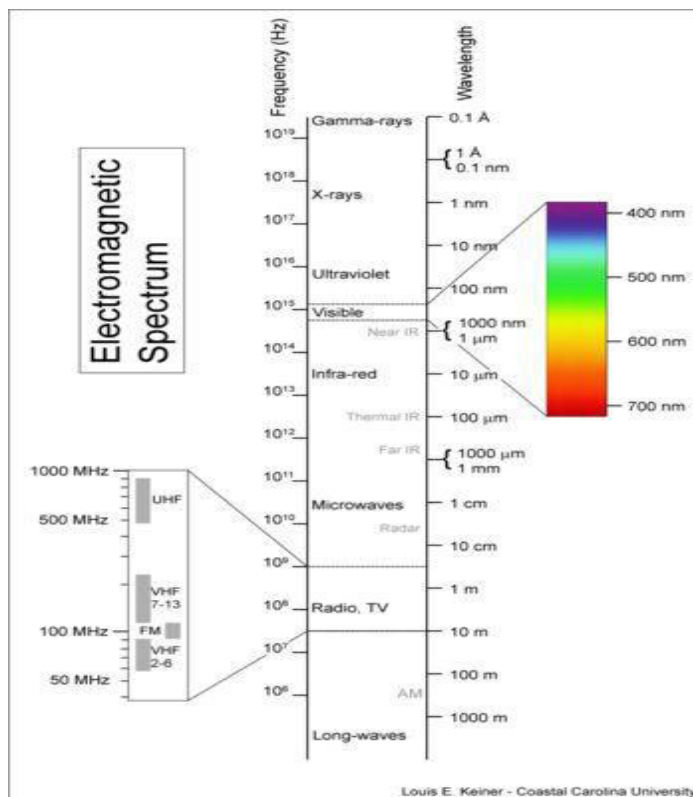

PT. INTEGRA SOLUTION TECHNOLOGY

Address :

Perum, Cendana Block D2 No 14, Batam Centre, Batam – Indonesia

Phone +62 (0) 778 475533 Fax +62 (0) 778 475409 Email: infosales@integra-ndt.com, website : www.integra-ndt.com



PT. Integra Solution
Technology

NDT SOLUTION & INTEGRITY


Certificate of Compliance

We, **SPECTRUM RESEARCH & TESTING LABORATORY, INC.**, Herewith confirm that one sample of the following product:

Product : FILM VIEWER
Model No. : VIEWER-LITE 0417, VIEW-LITE 1417
Applicant : KEIYU NDT SUPPLY COMPANY
#56, Lane 179, Neihu Road Sec. 2 Neihu.114,
Taipei/Taiwan R.O.C.

has been tested at our laboratory with positive results. The test records were represented in reference No.: **A08112610** according to the following standards:

CE : EN 55022:2006, Class A
EN 61000-3-2:2006
EN 61000-3-3:1995+A1:2001+A2:2005
EN 55024:1998+A1:2001+A2:2003
IEC 61000-4-2: 2001
IEC 61000-4-3: 2006
IEC 61000-4-4: 2004
IEC 61000-4-5: 2005
IEC 61000-4-6: 2006
IEC 61000-4-8: 2001
IEC 61000-4-11: 2004


Johnson Ho, Director

Issued Date: Dec. 15, 2008



SPECTRUM RESEARCH & TESTING LAB., INC.

Head Office: No. 101-10, Ling 8, Shan-Tong Li, Chungli City, Taoyuan, Taiwan R.O.C.
TEL:(03)498-7684 FAX:(03)498-8194 <http://www.srtlab.com> e-mail: sales@srtlab.com

Address :

Perum, Cendana Block D2 No 14, Batam Centre, Batam – Indonesia

Phone +62 (0) 778 475533 Fax +62 (0) 778 475409 Email: infosales@integra-ndt.com, website : www.integra-ndt.com